


- An inexpensive utility gauge for the broad commercial and industrial markets.
- Suitable for air, water, oil, gas or any other media not corrosive to brass.
- Other connection locations, mounting styles and accessories available.
- Ready for immediate shipment upon request.

## SPECIFICATIONS:

- **AVAILABLE DIAL SIZES:** 1 ½", 2", 2 ½", 3 ½", 4 ½"
- **AVAILABLE CONNECTION SIZES:**  
 1/8"NPT on 1 ½" and 2"Dial Sizes  
 ¼"NPT on 2" Thru 4 ½"Dial Sizes
- **Black Steel Case, Chrome Bezel**
- **Phosphour Bronze Bourdon Tube**
- **Brass Socket**
- **Polycarbonate Lens**
- **3-2-3 % Accuracy**
- **Dry Non-Fillable**
- **Ambient Temperature: -50 to 160°F**
- **Dual scale: PSI & Bar (x100=kpa)**      *standard*  
**Single scale: PSI only**                      *available*  
**Other:**    *by special request*

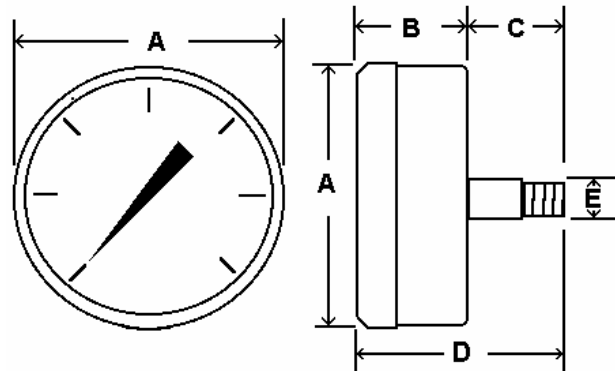

| RANGE    | CODE | Major Inc.     | Minor Inc.    |
|----------|------|----------------|---------------|
| 30/0"VAC | A    | 5" hg          | .5" hg        |
| 30/0/15  | CB   | 10"hg / 5 psi  | 1"hg / .5 psi |
| 30/0/30  | CC   | 10"hg / 10 psi | 1"hg / 1 psi  |
| 30/0/60  | CD   | 10"hg / 10 psi | 2"hg / 1 psi  |
| 30/0/100 | CE   | 30"hg / 20 psi | 5"hg / 2 psi  |
| 30/0/150 | CF   | 30"hg / 20 psi | 5"hg / 2 psi  |
| 30/0/300 | CH   | 30"hg / 50 psi | 10"hg / 5 psi |
| 0/15     | B    | 2 PSI          | .2 PSI        |
| 0/30     | C    | 5 PSI          | .5 PSI        |
| 0/60     | D    | 10 PSI         | 1 PSI         |
| 0/100    | E    | 20 PSI         | 2 PSI         |
| 0/160    | F    | 20 PSI         | 2 PSI         |
| 0/200    | G    | 40 PSI         | 5 PSI         |
| 0/300    | H    | 50 PSI         | 5 PSI         |
| 0/400    | I    | 50 PSI         | 5 PSI         |
| 0/600    | K    | 100 PSI        | 10 PSI        |
| 0/1000   | M    | 200 PSI        | 20 PSI        |
| 0/1500   | N    | 200 PSI        | 20 PSI        |
| 0/2000   | O    | 400 PSI        | 50 PSI        |
| 0/3000   | P    | 500 PSI        | 50 PSI        |
| 0/5000   | R    | 1000 PSI       | 100 PSI       |
| 0/6000   | S    | 1000 PSI       | 100 PSI       |
| 0/10,000 | U    | 2000 PSI       | 200 PSI       |

|                  |     | A     | B     | C    | D     | E            |
|------------------|-----|-------|-------|------|-------|--------------|
| <b>1" Dial</b>   | In. | .99"  | .64"  | .46" | 1.10" | 1/8"         |
|                  | MM  | 25    | 16    | 12   | 28    | MNPT         |
| <b>1 ½" Dial</b> | In. | 1.64" | .93"  | .63" | 1.56" | 1/8" or 1/4" |
|                  | MM  | 42    | 24    | 16   | 39    | MNPT         |
| <b>2" Dial</b>   | In. | 2.07" | 1.03" | .83" | 1.86" | 1/4"         |
|                  | MM  | 53    | 26    | 21   | 47    | MNPT         |
| <b>2 ½" Dial</b> | In. | 2.50" | 1.17" | .86" | 2.03" | 1/4"         |
|                  | MM  | 63    | 30    | 22   | 52    | MNPT         |
| <b>3 ½" Dial</b> | In. | 3.97" | 1.19" | .83" | 2.02" | 1/4"         |
|                  | MM  | 101   | 30    | 21   | 51    | MNPT         |
| <b>4 ½" Dial</b> | In. | 4.5"  | 1.34" | .84" | 2.18" | 1/4"         |
|                  | MM  | 114   | 34    | 21   | 55    | MNPT         |