


- A durable dry type utility gauge designed to look good from the front or back of the panel.
- These gauges are suitable for air, water, oil, gas or any other media not corrosive to brass.
- Other connection locations, mounting styles and accessories are also available.
- Ready for immediate shipment upon request.

SPECIFICATIONS:

- **AVAILABLE DIAL SIZES:** 1 ½", 2", 2 ½", 3 ½"
- **AVAILABLE CONNECTION SIZES:**
1/8"NPT on 1 ½" and 2"Dial Sizes
¼"NPT on 2" Thru 3 ½"Dial Sizes
- **Chrome Plated Steel Case, Chrome Bezel**
- **Phosphour Bronze Bourdon Tube**
- **Brass Socket**
- **Polycarbonate Lens**
- **3-2-3 % Accuracy**
- **Dry Non-Fillable**
- **Ambient Temperature: -50 to 160°F**
- **Dual scale: PSI & Bar (x100=kpa)** *standard available*
Single scale: PSI only *by special request*
- **Other:** *by special request*



RANGE	CODE	Major Inc.	Minor Inc.
30/0"VAC	A	5" hg	.5" hg
30/0/15	CB	10"hg / 5 psi	1"hg / .5 psi
30/0/30	CC	10"hg / 10 psi	1"hg / 1 psi
30/0/60	CD	10"hg / 10 psi	2"hg / 1 psi
30/0/100	CE	30"hg / 20 psi	5"hg / 2 psi
30/0/150	CF	30"hg / 20 psi	5"hg / 2 psi
30/0/300	CH	30"hg / 50 psi	10"hg / 5 psi
0/15	B	2 PSI	.2 PSI
0/30	C	5 PSI	.5 PSI
0/60	D	10 PSI	1 PSI
0/100	E	20 PSI	2 PSI
0/160	F	20 PSI	2 PSI
0/200	G	40 PSI	5 PSI
0/300	H	50 PSI	5 PSI
0/400	I	50 PSI	5 PSI
0/600	K	100 PSI	10 PSI
0/1000	M	200 PSI	20 PSI
0/1500	N	200 PSI	20 PSI
0/2000	O	400 PSI	50 PSI
0/3000	P	500 PSI	50 PSI
0/5000	R	1000 PSI	100 PSI
0/6000	S	1000 PSI	100 PSI
0/10,000	U	2000 PSI	200 PSI

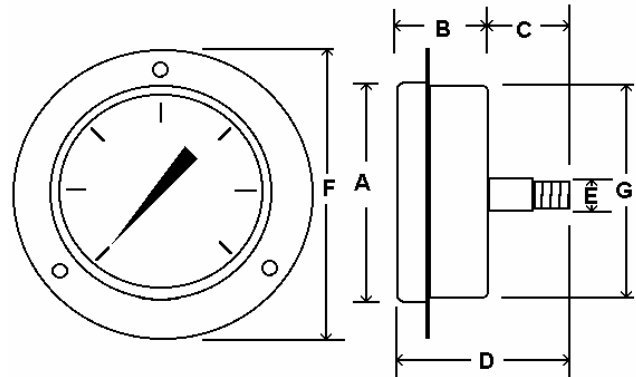

		A	B	C	D	F	G	E
1 ½" Dial	In.	1.82"	1.03"	.61"	1.64"	2.47"	1.61"	1/8" MNPT
	MM	46	26	15	42	63	41	
2" Dial	In.	2.31"	1.17"	.73"	1.90"	2.81"	2.02"	1/8 or 1/4 MNPT
	MM	59	30	18.5	48.5	71	51	
2 ½" Dial	In.	2.68"	1.19"	.76"	1.95"	3.44"	2.46"	1/4 MNPT
	MM	68	30	19	50	87	63	
3 ½" Dial	In.	3.97"	1.19"	.83"	2.02"	4.30"	3.59"	1/4 MNPT
	MM	101	30.2	21	51	109	91	